

:: TB120215 series Through Bore Slip Rings

Features

Continuous transmission of power and/or signal under 360° unrestrained rotation. Applies advanced fiber brush technology, free of maintenance or lubricating oil. Multi contact points in each circuit, low contact pressure, low noise, low contact wear; extremely long life-time. Standardized & modularized design; customized solutions also available.



TB120215 Slip Rings

[Online Chat](#)

Options(On your request)

Voltage/current Rated Speed Operating temperature Number of circuits
Housing material and color Outline dimension Special lead wire Lead exit location Lead length IP class Terminal type


Part Instruction:

TB : Through Bore	120 : Bore Size 120mm	215 : OD 215mm	P : Power Circuits	0610 : 6Circuits, 10A/Circuit	S : Signal(5A)	12 : 12 circuitsXSignal(5A)
--------------------------	------------------------------	-----------------------	---------------------------	--------------------------------------	-----------------------	------------------------------------

Specifications

Circuits	2~72	Voltage	P:800V / S:240VDC/VAC
Max Speed	300RPM	Contact material	Precious Metal:Gold-Gold
Housing Material	Aluminium Alloy	Torque	0.05N.m;+0.03N.m/6rings
Electrical noise	<5mOhm	Contact Resistance	<2mOhm
Dielectric strength	800VDC@50Hz	Lead Wire	Teflon AWG22(5A),AWG17(10A)
Insulation resistance	1000MΩ@600VDC	Lead Lengths	300mm(12")
Operating Temp.	-40°C to 80°C	Storage Temp.	-55°C to 85°C
Bearing.	Deep groove ball	Protection	IP51

Drawings

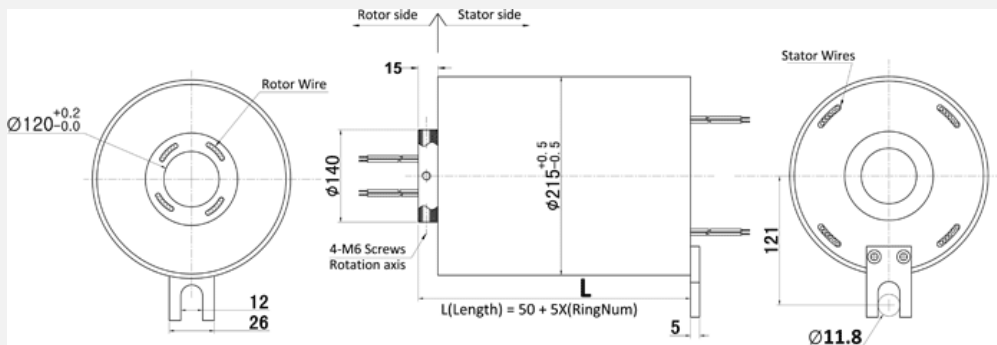

Standard Parts# in stock

Part#	10A	Signal(5A)	L(mm) - Length (L=50+5 X RingNum)
TB120215-P0210	2	0	60mm
TB120215-S02	0	2	60mm
TB120215-P0310	3	0	65mm
TB120215-P0210-S02	2	2	70mm
TB120215-P0610	6	0	80mm
TB120215-P0210-S04	2	4	80mm
TB120215-P0310-S03	3	3	80mm
TB120215-P0410-S02	4	2	80mm
TB120215-S06	0	6	80mm
TB120215-P1210	12	0	110mm

TB120215-S12	0	12	110mm
TB120215-P0210-S10	2	10	110mm
TB120215-P0410-S08	4	8	110mm
TB120215-P0610-S06	6	6	110mm
TB120215-P0810-S04	8	4	110mm
TB120215-P1810	18	0	140mm
TB120215-S18	0	18	140mm
TB120215-P0210-S16	2	16	140mm
TB120215-P0610-S12	6	12	140mm
TB120215-P1210-S06	12	6	140mm
TB120215-P2410	24	0	170mm
TB120215-S24	0	24	170mm
TB120215-P0410-S20	4	20	170mm
TB120215-P0610-S18	6	18	170mm
TB120215-P1210-S12	12	12	170mm
TB120215-P1810-S06	18	6	170mm
TB120215-P3010	30	0	200mm
TB120215-S30	0	30	200mm
TB120215-P0610-S24	6	24	200mm
TB120215-P1210-S18	12	18	200mm
Part#	10A	Signal(5A)	L(mm) - Length (L=50+5 X RingNum)
TB120215-S36	0	36	230mm
TB120215-P0610-S30	6	30	230mm
TB120215-P1210-S24	12	24	230mm
TB120215-P2410-S12	24	12	230mm
TB120215-S48	0	48	290mm
TB120215-P0610-S42	6	42	290mm
TB120215-P1210-S36	12	36	290mm
TB120215-P2410-S24	24	24	290mm
TB120215-S60	0	60	350mm
TB120215-P1210-S48	12	48	350mm
TB120215-P1810-S42	18	42	350mm
TB120215-P2410-S36	24	36	350mm
TB120215-S72	0	72	410mm
TB120215-P1210-S60	12	60	410mm
TB120215-P2410-S48	24	48	410mm
TB120215-P3610-S36	36	36	410mm

If used for servo motor power, encoder signal and devicenet,profinet,canbus,profibus ... and so on,
If used for IP65 or IP68, high temperature 250 degree,specified connectors,shielding cables,Large Current...
please contact our technical team for details: info@rionsr.com

Color Code Seq

6 colors for one group,indicated with number code pipe.

Lead wire Color codes						
Rings#	1	2	3	4	5	6
Color	BLK	RED	YEL	GRN	BLU	WHT

Typical applications

Industrial machinery-machining centers, rotary index table Heavy equipment turrets, cable reels, test equipments Packaging machines, palletizing machines, magnetic clutch, process equipment Rotary sensors, emergency lighting, robotics Exhibit/display equipment, medical equipment

Customized on your request

If you don't see what you want in this website,let us know; we may already have it designed or we will modify a design to meet your requirements. In many cases the specifications in the catalog can be changed to include bore size, circuits number, higher current/voltage,flange, lead wire length,shielding,connectors,higher speed,IP68,military grade,higher temperature, mixed with pneumatic/hydraulic capability. Please ask if you don't see exactly what you need as only a small fraction of our Rion slip rings are included in this catalog!

For a detailed outline drawing/3D modal files of a specific model number, or to request a quotation, please contact your local sales representative or send an email to sales@rionsr.com