

:: TB200320 series Through Bore Slip Rings

Features

Continuous transmission of power and/or signal under 360° unrestrained rotation. Applies advanced fiber brush technology, free of maintenance or lubricating oil. Multi contact points in each circuit, low contact pressure, low noise, low contact wear; extremely long life-time. Standardized & modularized design; customized solutions also available.

Options(On your request)

Voltage/current Rated Speed Operating temperature Number of circuits
Housing material and color Outline dimension Special lead wire Lead exit location Lead length IP class Terminal type

Part Instruction:

TB : Through Bore	200 : Bore Size 200mm	320 : OD 320mm	P : Power Circuits	06 : 6Circuits, 10A/Circuit	10 : 10A/Circuit	S : Signal(5A)	12 : 12 circuitsXSignal(5A)
--------------------------	------------------------------	-----------------------	---------------------------	------------------------------------	-------------------------	-----------------------	------------------------------------




TB200320 Slip Rings

[Online Chat](#)

Specifications

Circuits	2~24	Voltage	P:800V / S:240VDC/VAC
Max Speed	300RPM	Contact material	Precious Metal:Gold-Gold
Housing Material	Aluminium Alloy	Torque	0.05N.m;+0.03N.m/6rings
Electrical noise	<5mOhm	Contact Resistance	<2mOhm
Dielectric strength	800VDC@50Hz	Lead Wire	Teflon AWG22(5A),AWG17(10A)
Insulation resistance	1000MΩ@600VDC	Lead Lengths	300mm(12")
Operating Temp.	-40°C to 80°C	Storage Temp.	-55°C to 85°C
Bearing.	Deep groove ball	Protection	IP51

Drawings

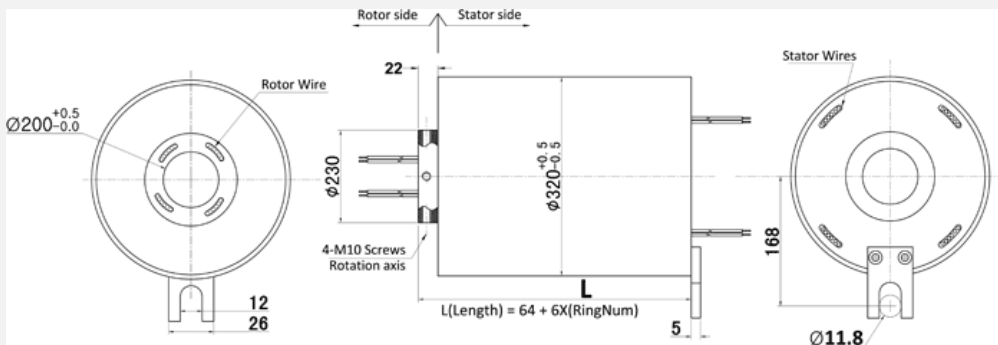

Standard Parts# in stock

Part#	10A	Signal(5A)	L(mm) - Length (L=64+6 X RingNum)
TB200320-P0210	2	0	76mm
TB200320-S02	0	2	76mm
TB200320-P0310	3	0	82mm
TB200320-P0210-S02	2	2	88mm
TB200320-P0610	6	0	100mm
TB200320-P0210-S04	2	4	100mm
TB200320-P0310-S03	3	3	100mm
TB200320-P0410-S02	4	2	100mm
TB200320-S06	0	6	100mm

TB200320-B1210	12	12	136mm
TB200320-P0210-S10	2	10	136mm
TB200320-P0410-S08	4	8	136mm
TB200320-P0610-S06	6	6	136mm
TB200320-P0810-S04	8	4	136mm
TB200320-P1810	18	0	172mm
TB200320-S18	0	18	172mm
TB200320-P0210-S16	2	16	172mm
TB200320-P0610-S12	6	12	172mm
TB200320-P1210-S06	12	6	172mm
TB200320-P2410	24	0	208mm
TB200320-S24	0	24	208mm
TB200320-P0410-S20	4	20	208mm
TB200320-P0610-S18	6	18	208mm
TB200320-P1210-S12	12	12	208mm
TB200320-P1810-S06	18	6	208mm

If used for servo motor power, encoder signal and devicenet,profinet,canbus,profibus ... and so on,
 If used for IP65 or IP68, high temperature 250 degree,specified connectors,shielding cables,Large Current...
 please contact our technical team for details: info@rionsr.com

Color Code Seq

6 colors for one group,indicated with number code pipe.

Lead wire Color codes						
Rings#	1	2	3	4	5	6
Color	BLK	RED	YEL	GRN	BLU	WHT

Typical applications

Industrial machinery-machining centers, rotary index table Heavy equipment turrets, cable reels, test equipments Packaging machines, palletizing machines, magnetic clutch, process equipment Rotary sensors, emergency lighting, robotics Exhibit/display equipment, medical equipment

Customized on your request

If you don't see what you want in this website,let us know; we may already have it designed or we will modify a design to meet your requirements. In many cases the specifications in the catalog can be changed to include bore size, circuits number, higher current/voltage,flange, lead wire length,shielding,connectors,higher speed,IP68,military grade,higher temperature, mixed with pneumatic/hydraulic capability. Please ask if you don't see exactly what you need as only a small fraction of our Rion slip rings are included in this catalog!

For a detailed outline drawing/3D modal files of a specific model number, or to request a quotation, please contact your local sales representative or send an email to sales@rionsr.com